

# AX M-54 3.2

## premium sol

*Photovoltaic modules from German manufacturer -  
developed and manufactured with  
German quality demand*

**reliable . powerful . attractive  
passionate . honest . empathic**


## BIPV

monocrystalline solar module AX M-54 premium sol,  
developed for the perfect building integration

## SOLRIF®

Solrif has become the market leader with their patented BIPV-System and is well-established due to high yields, functional aesthetics and simple installation. A high efficiency solar roof tile has been developed using PV laminates from AxSun and the Solrif BIPV mounting system from Schweizer. Thus, conventional roof tiles can be totally replaced on a pitched roof.

Our BIPV-System is a real integration compared to roof-mounted PV systems.

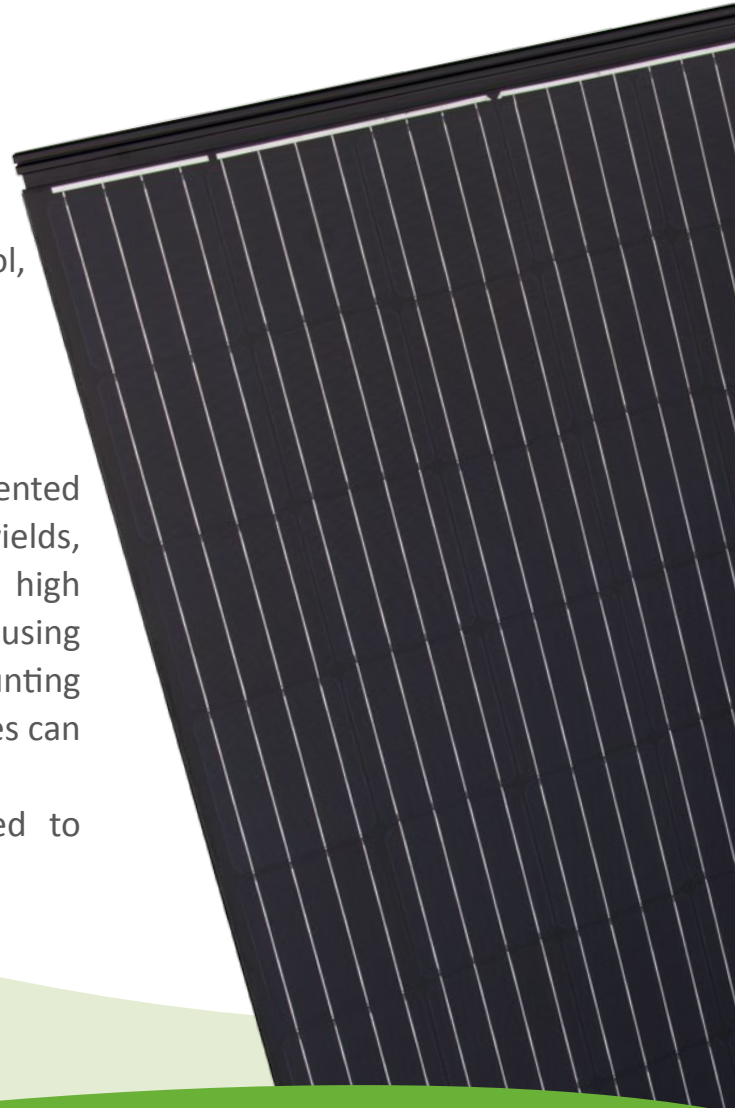

- ▶ 15 year product guarantee on products with tempered safety solar glass
- ▶ 10 year product guarantee on premium products with ARC tempered safety solar glass (anti-reflection coating)
- ▶ 25 year performance guarantee

- ▶ very good performance tolerance +0/+5Wp
- ▶ compatible with all common inverters
- ▶ constant production control
- ▶ Processing of high quality components according to German quality standards



# AX M-54<sup>3.2</sup>

## premium sol


www.axsun.de

Basic data	Sol-Laminate
Dimensions (Length x Width x Height)	1538 x 1020 x 18 mm
Dimensions (Installation) (Length x Width x Height)	1520 x 988 x 18 mm
Weight	15.6 kg
Cells	54 monocrystalline Solarzellen (156x156 mm)
Glass	3.2 mm hardened solar glas
Frame	SOLRIF® frame
Bypass-diodes	3 pieces
Connecting socket	plastic, IP65 type of protection
Cable, Plug	4mm <sup>2</sup> solar cable, 1000 mm long, high-quality plug system, MC4
Max. Voltage	1000 V
Max. return current	15 A
Temperature range	-40°C to 85°C
Max. pressure load	5400 Pascal
Max. dynamic load	2400 Pascal
Application class (acc. to IEC 61730)	A
Fire class (acc. to IEC 61730)	C
Protection class	II

Electrical data under standard test conditions *		AX M-54 245	AX M-54 250	AX M-54 255
Rated power	$P_{MPP}$ [Wattpeak]	245 Wp	250 Wp	255 Wp
Rated voltage	$U_{MPP}$ [Volt]	27.56 V	27.85 V	28.14 V
Rated current	$I_{MPP}$ [Ampere]	8.89 A	8.98 A	9.06 A
No-load voltage	$U_{OC}$ [Volt]	33.90 V	34.26 V	34.61 V
Short-circuit current	$I_{SC}$ [Ampere]	9.50 A	9.60 A	9.69 A
Efficiency	$\eta$	15.62 %	15.94 %	16.25 %

Electrical behaviour under NOCT**		AX M-54 178 Wp	AX M-54 181 Wp	AX M-54 185 Wp
Rated power NOCT	$P_{NOCT}$ [Wattpeak]	178 Wp	181 Wp	185 Wp
Rated voltage	$U_{MPP}$ [Volt]	24.66 V	24.92 V	25.18 V
Rated current	$I_{MPP}$ [Ampere]	7.19 A	7.26 A	7.33 A
No-load voltage	$U_{OC}$ [Volt]	30.82 V	31.14 V	31.47 V
Short-circuit current	$I_{SC}$ [Ampere]	7.69 A	7.77 A	7.84 A

Temperature coefficient (in case of temperature change)		
Power	$P_{MPP}$ [Wattpeak]	$Tk P_{MPP} = -0.42 \% / K$
Voltage	$U_{OC}$ [Volt]	$Tk U_{OC} = -0.32 \% / K$
Current	$I_{SC}$ [Ampere]	$Tk I_{SC} = 0.043 \% / K$

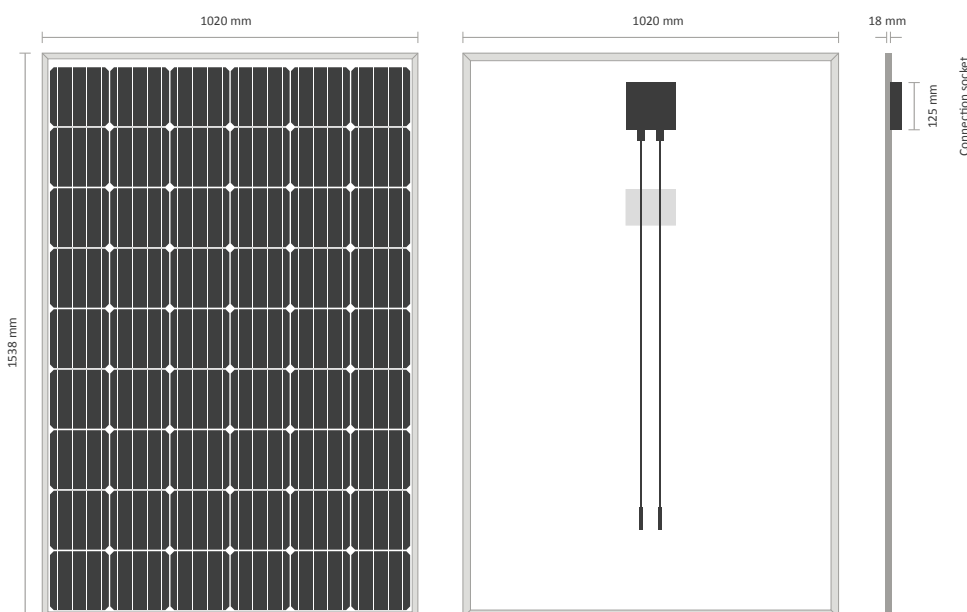

take way  
for an easy way



Sales partner AxSun Solar

100%  
MADE IN  
GERMANY

AxSun Solar GmbH & Co. KG • 02.2017 • Subject to error and technical modifications

Certified in accordance with IEC 61215 ed.2 and IEC 61730 u. p. • Further information in the assembly and installation instructions • You can call up our detailed guarantee and performance conditions under www.axsun.de • WEEE-Reg.-Nr. DE 71294982 • All data on this data sheet comply with DIN EN 50380 • Measuring tolerance rated power: +/- 4%; other values: Measuring tolerance: +/- 10% • \* Standard test conditions (STC): Radiation into module plane 1,000 W/m<sup>2</sup>, (AM) 1.5; 25°C • \*\* Normal Operating Cell Temperature (NOCT): 800 W/m<sup>2</sup>, (AM) 1.5; 47°C • BIPV-Mounting System Solrif is certified according to TÜVdot. Com. The manufacturer of the system, Ernst Schweizer AG, Hedingen, Switzerland, gives 10 years warranty of the supplied material and parts of the system to AxSun according to the Schweizer terms of warranty, which we send you on demand. In case of warranty please refer to AxSun. The warranty agreement of Ernst Schweizer AG does not refer to the solar modules and the terms of warranty of AxSun Solar GmbH & Co.KG