

AX M-60 3.2 premium sol

*Photovoltaic modules from German manufacturer -
developed and manufactured with
German quality demand*

reliable . powerful . attractive

Elegant and powerful In-roof solar module

BIPV

monocrystalline solar module AX M-60 premium sol,
developed for the perfect building integration

SOLRIF®

Solrif has become the market leader with their patented BIPV-System and is well-established due to high yields, functional aesthetics and simple installation. A high efficiency solar roof tile has been developed using PV laminates from AxSun and the Solrif BIPV mounting system from Schweizer. Thus, conventional roof tiles can be totally replaced on a pitched roof.

Our BIPV-System is a real integration compared to roof-mounted PV systems.



MADE IN
GERMANY



HIGHPOWER!

- ▶ 15 years product guarantee
- ▶ 25 years product guarantee optionally available
- ▶ 25 year performance guarantee
- ▶ very good performance tolerance 0/+5Wp
- ▶ compatible with all common inverters

- ▶ constant production control
- ▶ processing of high quality components according to German quality standards



AX M-60^{3.2} premium sol


www.axsun.de

Basic data	Sol-Laminate
Dimensions (Length x Width x Height)	1709 x 1028 x 18 mm
Dimensions (Installation) (Length x Width x Height)	1691 x 996 x 18 mm
Weight	20.7 kg
Cells	60 monocrystalline solar cells (159x159 mm)
Glass	3.2 mm hardened safety glass
frame	SOLRIF® frame
Bypass-diodes	3 pieces (SMD diodes with cooling plate)
connection socket	plastic, IP67 type of protection
Cable, plug	4mm ² solar cable, 1.000 mm long, high-quality plug system, original MC4
Max. Voltage	1000 V
Max. return current	20 A
Temperature range	-40°C to 85°C
Max. pressure load	5400 Pascal (please observe operation manual)
Max. dynamic load	2400 Pascal
Application class (acc. to IEC 61730)	A
Fire class (acc. to IEC 61730)	C
Protection class	II

Electrical data under standard test conditions *		AX M-60 320	AX M-60 325	AX M-60 330
Rated power	P_{MPP} [Wattpeak]	320 Wp	325 Wp	330 Wp
Rated voltage	U_{MPP} [Volt]	34.15 V	34.57 V	34.92 V
Rated current	I_{MPP} [Ampere]	9.37 A	9.40 A	9.45 A
No-load voltage	U_{OC} [Volt]	42.01 V	42.53 V	42.95 V
Short-circuit current	I_{SC} [Ampere]	10.02 A	10.05 A	10.10 A
Efficiency	η	18.21 %	18.50 %	18.78 %

Electrical behaviour under NOCT**				
Rated power NOCT	P_{NOCT} [Wattpeak]	232 Wp	236 Wp	239 Wp
Rated voltage	U_{MPP} [Volt]	30.56 V	30.94 V	31.24 V
Rated current	I_{MPP} [Ampere]	7.58 A	7.61 A	7.65 A
No-load voltage	U_{OC} [Volt]	38.19 V	38.66 V	39.05 V
Short-circuit current	I_{SC} [Ampere]	8.11 A	8.13 A	8.18 A

Temperature coefficient (in case of temperature change)		
Power	P_{MPP} [Wattpeak]	$Tk P_{MPP} = -0.38 \% / K$
Voltage	U_{OC} [Volt]	$Tk U_{OC} = -0.30 \% / K$
Current	I_{SC} [Ampere]	$Tk I_{SC} = 0.06 \% / K$

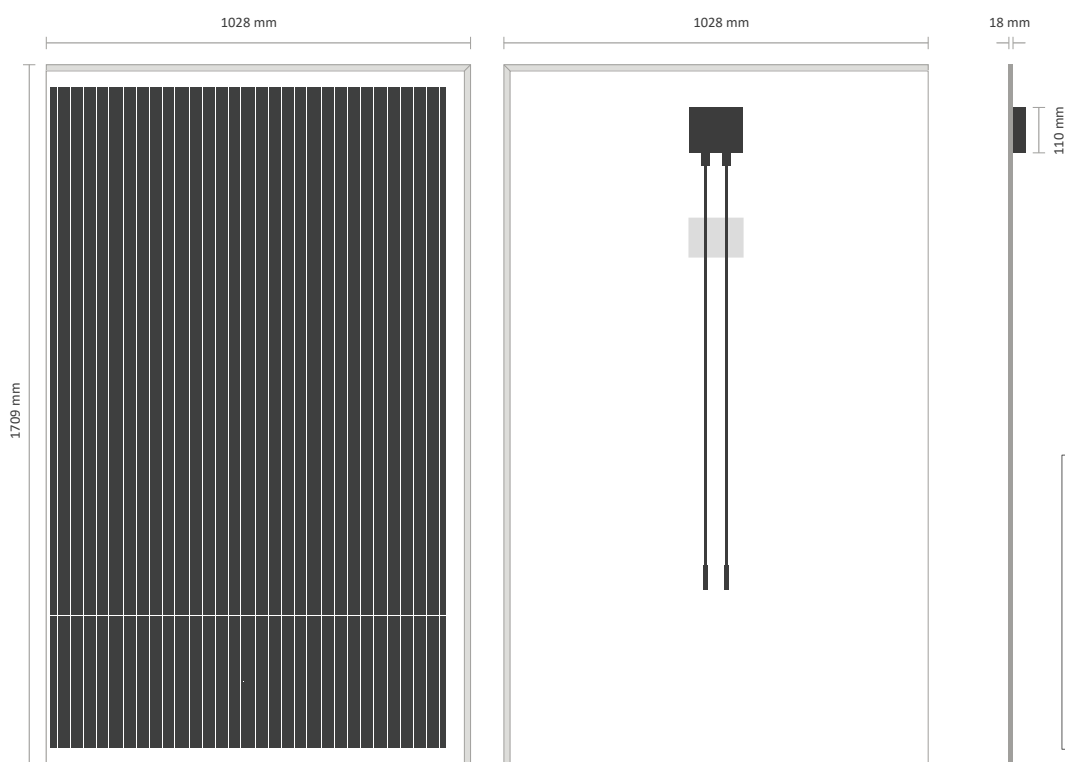

Connection Socket

take way
for an easy way



Sales partner AxSun Solar

MADE IN
GERMANY

Certified in accordance with IEC 61215 ed.2 and IEC 61730 u. p. • Further information in the assembly and installation instructions • You can call up our detailed guarantee and performance conditions under www.axsun.de • WEEE-Reg.-Nr. DE 71294982 • All data on this data sheet comply with DIN EN 50380 • Measuring tolerance rated power: +/- 4%; other values: Measuring tolerance: +/- 10% • * Standard test conditions (STC): Radiation into module plane 1,000 W/m², (AM) 1.5; 25°C • ** Normal Operating Cell Temperature (NOCT): 800 W/m², (AM) 1.5; 47°C • BIPV-Mounting System Solrif is certified according to TÜVdot. Com. The manufacturer of the system, Ernst Schweizer AG, Hedingen, Switzerland, gives 10 years warranty of the supplied material and parts of the system to AxSun according to the Schweizer terms of warranty, which we send you on demand. In case of warranty please refer to AxSun. The warranty agreement of Ernst Schweizer AG does not refer to the solar modules and the terms of warranty of AxSun Solar GmbH & Co. KG