


AX M-60 3.2 premium

AXSUN Solar
„German Modules with Character“

*Photovoltaic modules from German manufacturer -
developed and manufactured with German quality demand*

reliable . powerful . attractive
passionate . honest . empathic

- ▶ High mechanical resistance
- ▶ Optimal use of the sun by high-efficiency monocrystalline cells
- ▶ Plus sorting for extra yield
- ▶ PID free
- ▶ 100% EL tested
- ▶ 100% Made in Germany

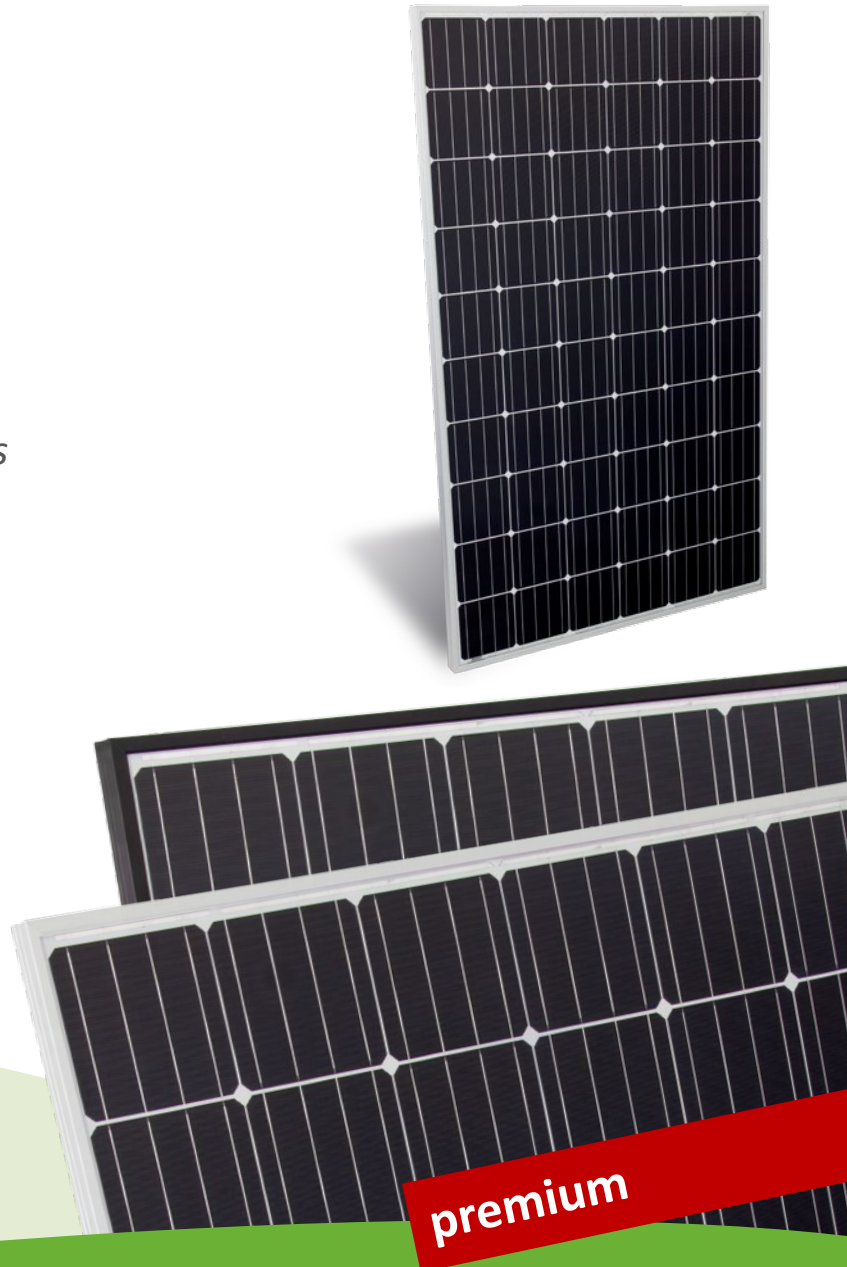

- ▶ 15 years product guarantee on products with tempered safety solar glass
- ▶ 10 years product guarantee on premium products with ARC tempered safety solar glass (anti-reflection coating)
- ▶ 25 year performance guarantee
- ▶ very good performance tolerance 0/+5Wp
- ▶ compatible with all common inverters

- ▶ constant production control
- ▶ Processing of high quality components according to German quality standards
- ▶ further option of integrated Solaredge Power Optimizer maximizing the kWh output up to 25%



www.axsun.de

AX M-60^{3.2} premium

www.axsun.de

Basic data

Dimensions (LxWxH)	1655 x 995 x 40 mm
Weight	18 kg
Cells	60 monocrystalline solar cells (156x156 mm)
Glass	3.2 mm hardened safety glass, optional with anti-reflection coating
Frame	Anodised aluminium section with hollow chamber and drainage holes, black or silver anodised
Bypass diodes	3 pieces
Connection socket	Connecting socket plastic, IP65 type of protection, optional with embedded Solaredge power optimizer
Cable, plug	4mm ² solar cable, 1000 mm long, high-quality plug system, MC4
Max. Voltage	1000 V
Max. return current	15 A
Temperature range	-40°C to 85°C
Max. pressure load <small>(with third mounting rail, please follow installation instructions)</small>	7200 Pascal
Max. pressure load	5400 Pascal
Max. dynamic load	2400 Pascal
Application class <small>(acc. to IEC 61730)</small>	A
Fire class <small>(acc. to IEC 61730)</small>	C
Protection class	II
Laminate	Dimensions 1648 x 988 x 5 mm, Weight 16.9 kg

Electrical data

under standard test conditions *


		AX M-60 270	AX M-60 275	AX M-60 280
Rated power	P_{MPP} [Wattpeak]	270 Wp	275 Wp	280 Wp
Rated voltage	U_{MPP} [Volt]	30.96 V	31.21 V	31.46 V
Rated current	I_{MPP} [Ampere]	8.72 A	8.81 A	8.90 A
No-load voltage	U_{OC} [Volt]	38.08 V	38.39 V	38.70 V
Short-circuit current	I_{SC} [Ampere]	9.32 A	9.42 A	9.51 A
Efficiency	η	16.40 %	16.70 %	17.00 %

Electrical behaviour under NOCT**

Rated power NOCT	P_{NOCT} [Wattpeak]	196 Wp	199 Wp	203 Wp
Rated voltage	U_{MPP} [Volt]	27.70 V	27.93 V	28.15 V
Rated current	I_{MPP} [Ampere]	7.06 A	7.13 A	7.20 A
No-load voltage	U_{OC} [Volt]	34.62 V	34.9 V	35.18 V
Short-circuit current	I_{SC} [Ampere]	7.55 A	7.62 A	7.70 A

Temperature coefficient (in case of temperature change)

Power	P_{MPP} [Wattpeak]	$Tk P_{MPP} = -0.42 \% / K$
Voltage	U_{OC} [Volt]	$Tk U_{OC} = -0.32 \% / K$
Current	I_{SC} [Ampere]	$Tk I_{SC} = 0.043 \% / K$

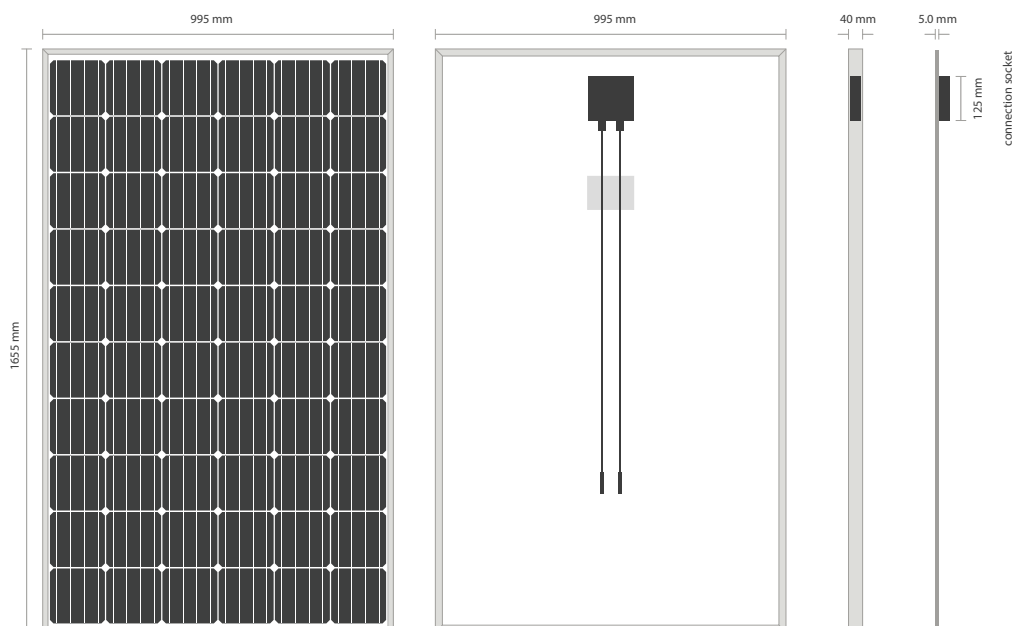

take way
for an easy way



Sales partner AxSun Solar

100%
MADE IN
GERMANY

AxSun Solar GmbH & Co. KG • 02.2017 • Subject to error and technical modifications